MODULAR VARIABLE SPEED PRESSURE BOOSTER

NSF/ANSI

61 & 372 Certified

DUPLEX PRESSURE BOOSTER

Energy Efficient and Ready To Go NOW!

The Duplex Modular Variable Speed Pressure Booster by HYFAB is the All-Star in any lineup! Multiple models are ready to assist in boosting and maintaining pressure for better control. With its ease in installation options the MVP is ready to get into the game right now.

Unlike the competition...


The small footprint and light weight of the MVP makes it agile and quick to the spot. With the ability to fit through a standard doorway, the MVP makes short work of improving energy efficiencies and installations where and when you need it.

As with all HYFAB boosters, the MVP is factory tested and approved before it leaves our inventory.

#Demandset PRESSURE BOOSTER CONTROLLER

Increasesd energy savings by monitoring demand and adjusting setpoint! No remote pressure sensor is needed.

BACnet and Modbus Communication provided on every unit.

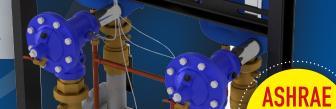




Compliant





Model Identification

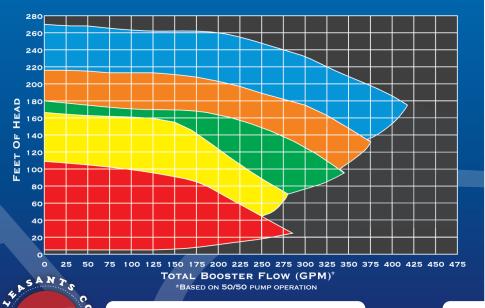

MVP-850-XXX

Booster Pump Series Size


Voltage (208) (460)

: Horsepower

- MVP-630-XXX
 (Duplex 3HP Booster, 515 lbs.)
- MVP-850-XXX
 (Duplex 5HP Booster, 537 lbs.)
- MVP-875-XXX (Duplex 7.5HP Booster, 557 lbs.)
- MVP-8100-XXX
 (Duplex 10HP Booster, 605 lbs.)
- MVP-8150-XXX (Duplex 15HP Booster, 650 lbs.)

Booster Dimensions

Optional Accessories

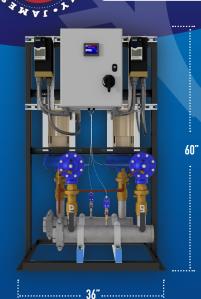

4" Stainless Steel Grooved Headers Same Footprint For All Models Easily Configurable Field Connections NSF Certified



Fits Through Standard Door Opening Single Point Power Connection Every MVP Booster Is Factory Flow Tested ASHRAE 90.1–2010 Compliant



Flange Adapters
(MVP-FK-4)




Copper Transition Fittings (MVP-TF-4)



Hydro-Pneumatic Tank Easy Connect End Cap (MVP-TC-4)



Hydro-Pneumatic Tank 3-7.5HP (FX60V, Non-ASME) (FX85A, ASME)



Recommended Minimum Tank Size



Outdoor Enclosure (MVP-ENC)



Flexible Transition Fittings (MVP-FTC-3C) (MVP-FTC-4C) (MVP-FTC-4F)

