

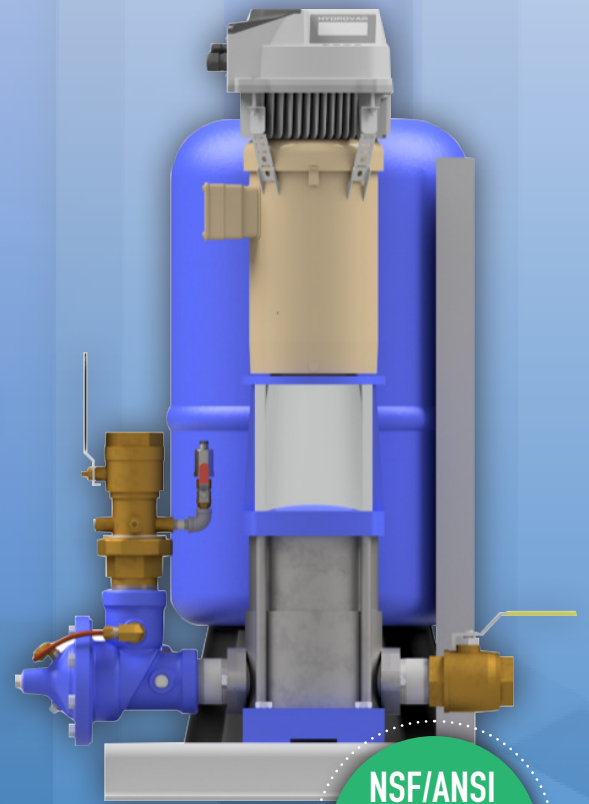


# eMVP


MODULAR VARIABLE SPEED PRESSURE BOOSTER

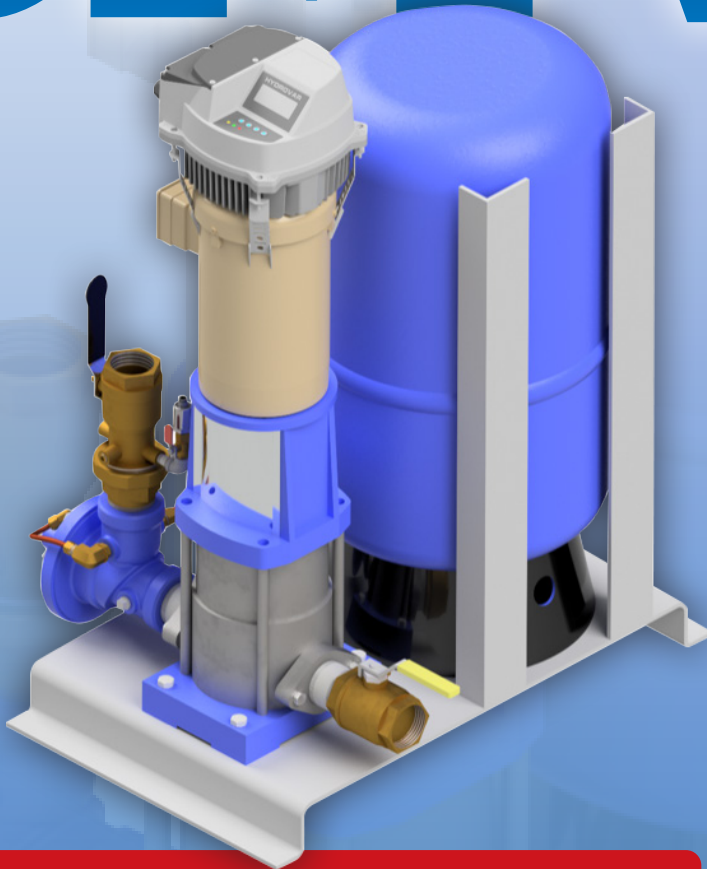

## The eMVPjr Advantage

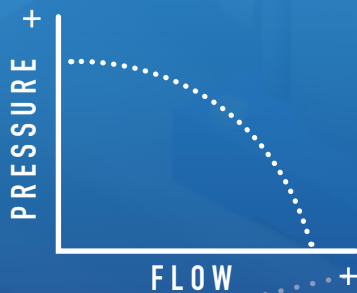

Water pressure drops when demand is high.

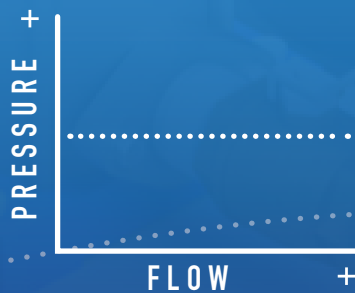

The eMVPjr makes up the pressure difference at peak demand for constant water pressure

NSF/ANSI  
61 & 372  
Certified



Contact us for information on how to get an eMVPjr into your lineup.

888.902.8324 / hyfabco.com

# Model Identification

## eMVPjr - X X X


Booster

HP

Voltage

High/Low  
Pressure


21=208-230 / 1 / 60  
23=208 / 3 / 60  
43=460 / 3 / 60

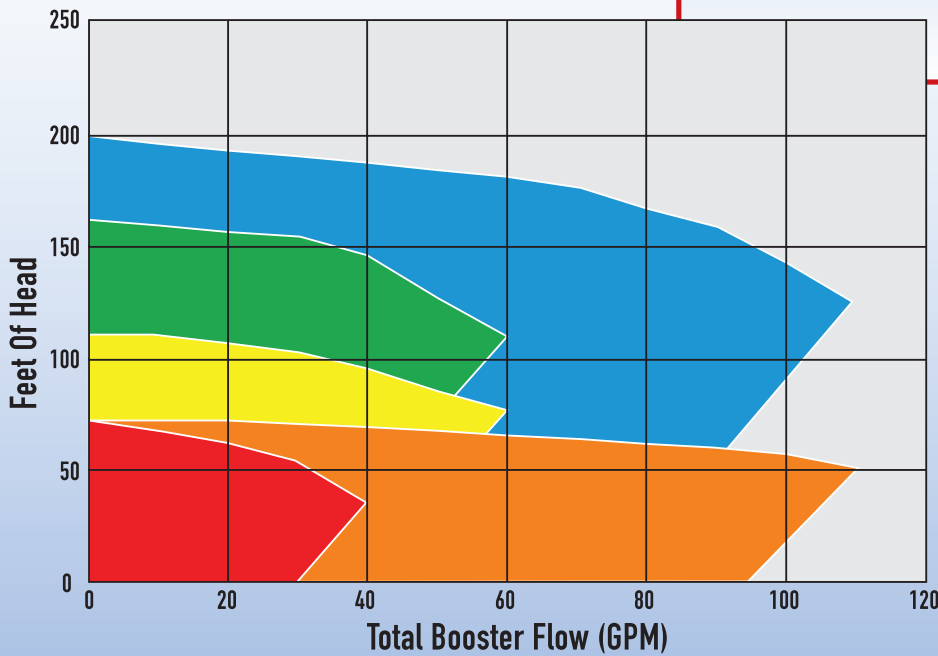

- eMVPjr-1LX
- eMVPjr-2LX
- eMVPjr-3HX
- eMVPjr-3LX
- eMVPjr-5HX

Custom units available on request

# Booster Dimensions (max.)

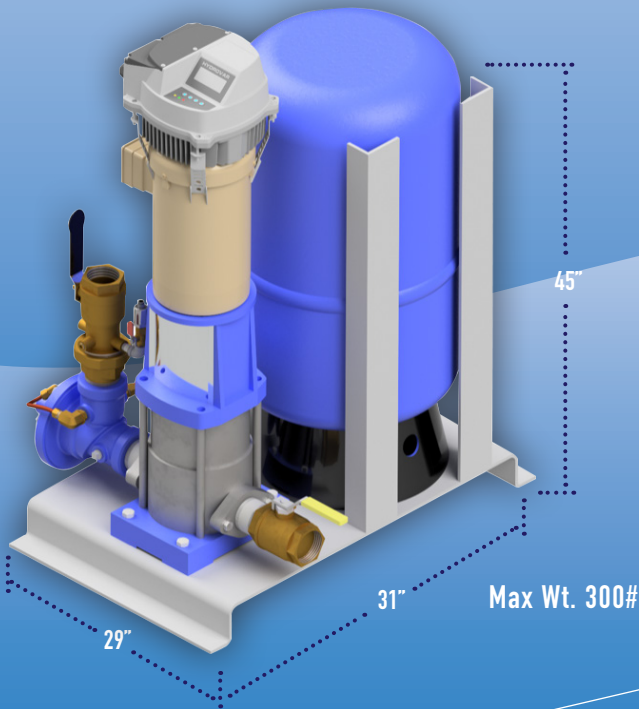

Modular Variable Speed Pressure Booster Jr.  
HP = 1, 2, 3, 5  
Pressure: L= Low, H = High  
Voltage: 21 = 208-230 / 1 / 60  
23 = 208 / 3 / 60, 43 = 460 / 3 / 60  
Inlet/Outlet Connection Size

Stock models available

eMVPjr	1	L	21	1.5"
eMVPjr	2	L	21	2"
eMVPjr	3	L	21	2"
eMVPjr	3	L	23	2"
eMVPjr	3	L	43	2"
eMVPjr	3	H	21	2"
eMVPjr	3	H	23	2"
eMVPjr	3	H	43	2"
eMVPjr	5	H	21	2"
eMVPjr	5	H	23	2"
eMVPjr	5	H	43	2"



Contact us for information on how to get an eMVPjr into your lineup.

888.902.8324

hyfabco.com